

Technical Data Sheet

CODE 11110

MG 90/3,5"

In-line axial fans



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50	Voltage (V)	220-240
Insulation class	II°	Weight (Kg)	0,45
IP	X4	Max airflow (l/s)	18
Max absorbed current (A)	0,10	Max airflow (m³/h)	65
Max absorbed power (W)	18	Max pressure (mmH2O)	2,1
Max ambient temperature for continuous operation (°C)	40	Max pressure (Pa)	21
Nominal diameter (mm)	100	RPM	2450
		Sound pressure Lp [dB (A)] at 3 m	38

Dimensions

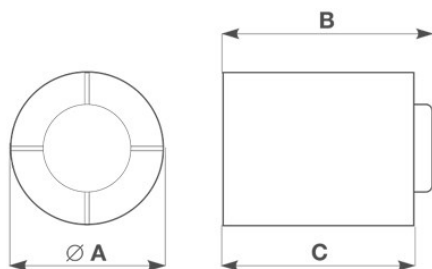

Size A (mm)	Ø 92,5
Size B (mm)	92
Size C (mm)	89

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 11110

MG 90/3,5"


In-line axial fans



Description

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 90 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 65 m³/h.
- Vortice speed controllers.

Curves

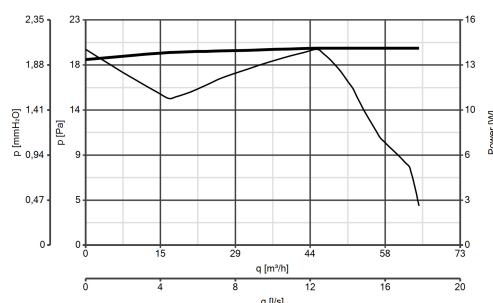


Accessories



C 1.5 (COMANDO EL. 1.5 A)

Code 12966



STAFFA SOTTOTETTO/SOFFITTO D.90/100

Code 22259



SCNRB I

Code 12971



KIT SCB (TRASF.E.C.)

Code 22481

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com